

KX-NT680 / KX-NT630 IP Proprietary Telephone

## Designed for Intuitive Communication

Introducing the next generation of communication equipment, ready for the future with the ever-changing business world in mind. This new line of IP proprietary phones feature a clear color LCD, integrated High Definition Audio and an enhanced user interface.



**KX-NT680-B**  
Color LCD



### Intuitive Operation

The highly-intuitive color LCD screen includes color and icons providing understandable information and allowing every detail to be visible at-a-glance.



### Customization

The KX-NT680 can import an image file to display on the LCD screen for implementing corporate branding or other information customizing the LCD screen.

**KX-NT630-B**  
Monochrome LCD




## 48 Flexible Function Keys\*

Flexible Function Keys can be used for programming frequently used numbers, features or settings.

\*Available on the KX-NT680 only. The KX-NT630 supports 4 pages of 6 keys each, providing a total of 24 flexible keys.

12Keys x 4Pages\* (48 Flexible Function Keys)

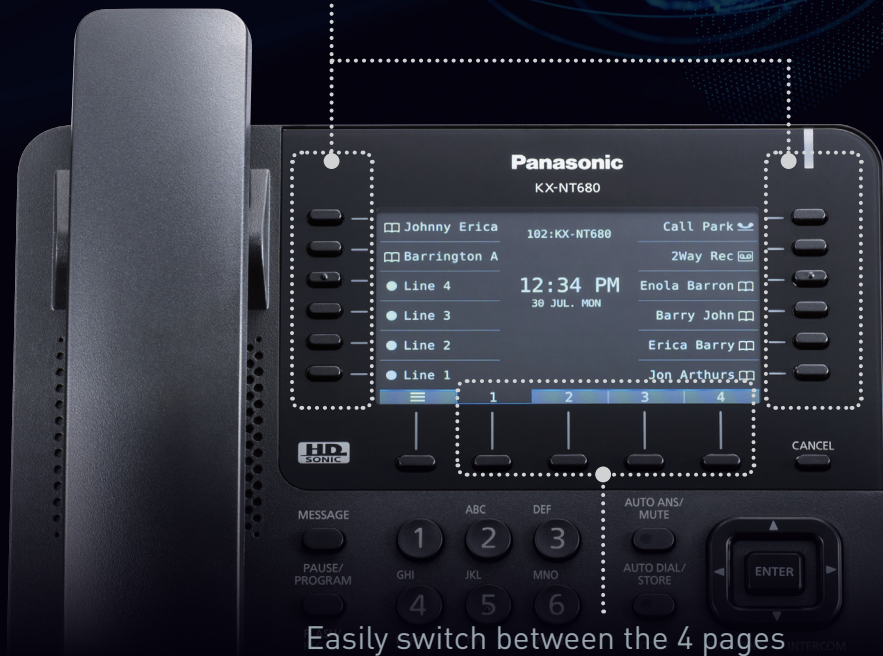

Easily switch between the 4 pages with tab selection keys

## SRTP Supported

IP communications are becoming more susceptible to attacks. By supporting SRTP we encrypt our communication packets and create a secure and solid communication channel.

## Centralized Management

Now it is easier than ever to set up a remote terminal with embedded centralized management. Administrators can alter settings and make adjustments across the network with ease.

## Specifications

### Color LCD



### Monochrome LCD



### Optional Accessories

- AC Adaptor: KX-A424
- Wall mount kit: KX-A435

### Applicable Communication Server

- KX-NS700/700G/1000 Series Version 7.0 or later
- KX-NSX2000 Version 4.0 or later

### Display Features

- KX-NT680: 480 x 272 pixel Color TFT LCD
- KX-NT630: 6-Line Monochrome LCD with Backlight
- Customized Image Display (KX-NT680 only)

### Phone Features

- 12 x 4 pages Flexible Function Key (KX-NT680)
- 6 x 4 pages Flexible Function Key (KX-NT630)
- Self-Labeling for Flexible Function Key

### Interface

- Gigabit 10/100/1000Mbps Ethernet (2 ports)
- PoE (IEEE 802.3af)
- Headset port (2.5 mm pin jack)
- EHS supported (KX-NT680 only)
- Bluetooth® Built-in (KX-NT680 only)

### Others

- Operating Environment: 32-104 degrees F
- Dimensions (Includes Handset):
  - KX-NT680: 8.7"W x 7.3"D x 7.5"H (High Position)
  - 8"W x 7.4"D x 6.1"H (Low Position)
  - KX-NT630: 8.7"W x 7.3"D x 7.5"H (High Position)
  - 8"W x 7.4"D x 6.1"H (Low Position)
- Weight (Includes Handset):
  - KX-NT680: 2.1 lbs.
  - KX-NT630: 2.0 lbs.

The Bluetooth® word mark is a registered trademark owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic is under license.

Weights and dimensions are approximate.

Design and specifications subject to change without notice.

**VICK HOUSTONS**  
949-610-7707